


Performance Chart

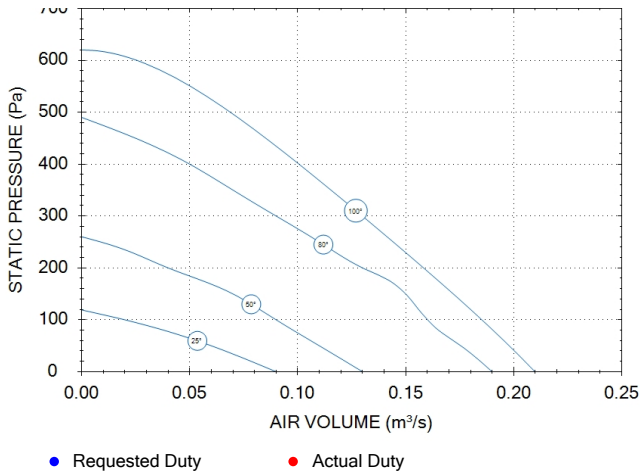

TOTUS2MINI

Tech Ref File:
 Stock Reference: TOTUS2MINI
 Product Type: Ventilation
 Product Range: Heat Recovery
 Impeller: Backward Curved
 Casing: Aluzinc
 Speed: Variable
 Airstream Temperature: -10°C to 40°C
 dBA: 31
 Specific Fan Power & dB(A) shown are at duty point.

Warranty: Up to 5 years

Electrical Information

Supply Voltage: 220-240V/1/50Hz
 Full Load Current: 12 A
 Insulation: B
 Motor IP Rating: IP54
 S.T.O.P. Protection: Yes
 Speed Controllable: In Built

Acoustic Information

	63	125	250	500	1k	2k	4k	8k	Total	dBA@3m
Inlet	55	59	55	50	49	53	37	36	63	36
Outlet	59	68	74	66	63	67	55	57	76	51
Breakout	55	53	55	47	43	46	33	31	60	31

Sound Power Level Spectra dB (re 10⁻¹² Watts)


For ducted units, sound power is given as In Duct with end reflections added.
 Stated dB(A) levels at 3m with spherical propagation at a reference level of 2 x 10⁻¹² Pa

Optional Accessories

Part No	Description
10536250	IN LINE ATTEN. 025-090
10535250	IN LINE ATTEN. 025-060
10531250T1	HEAT.BATTERY+CONTROLS 250
10533250	FILTER CASSETTE 250
432949	ECOTRONIC 24V DC SENTINEL
432945	AMB.RESP.HUM.SENSOR 24VDC
432953	AIR QUALITY SENSOR 24V DC
FLX250	FLEXIBLE CONNECTOR

Part No	Description
433162	VISIONEX 24V DC PIR
426332	TSLC1 CONTROLLER BOXED
433257	SENTINEL TEMP/CO2 SENSOR
433193	SENTINEL POWER SUPPLY
433259	SENTINEL CO2 DUCT SENSOR
10537250	IN LINE ATTEN. 025-120

Dimensions

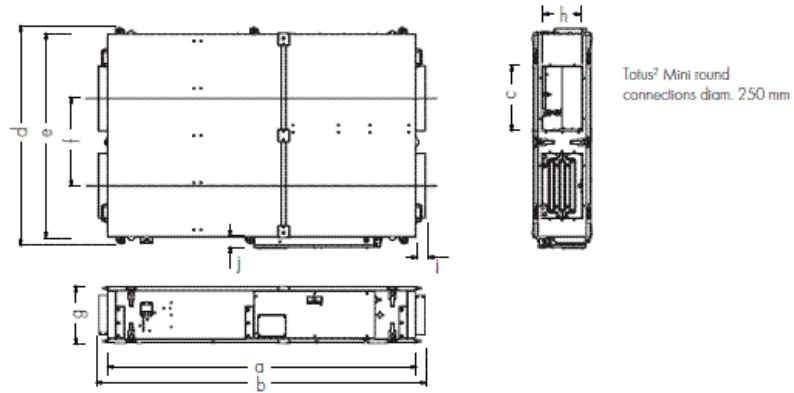

a	b	c	d	e	f	g	h	i	j
1800	1910	250Ø	970	900	450	350	250Ø	55	70

-
-

Dimensions shown in mm
 Weights in kg