

Accessory


Used to suspend a variety of HVAC, mechanical and electrical services from different substrates, to be used with B-Lock side release hangers.

FEATURES / BENEFITS

- Ideal for the fast suspension of lighting, signage, acoustics, mechanical and electrical services
- Up to six times faster to install than traditional methods of installation
- Strong, safe and industry approved
- Aesthetically discreet and lightweight, when used with B-Lock hangers




INSTALLATION & ADJUSTMENT USING B-LOCK SIDE RELEASE HANGERS

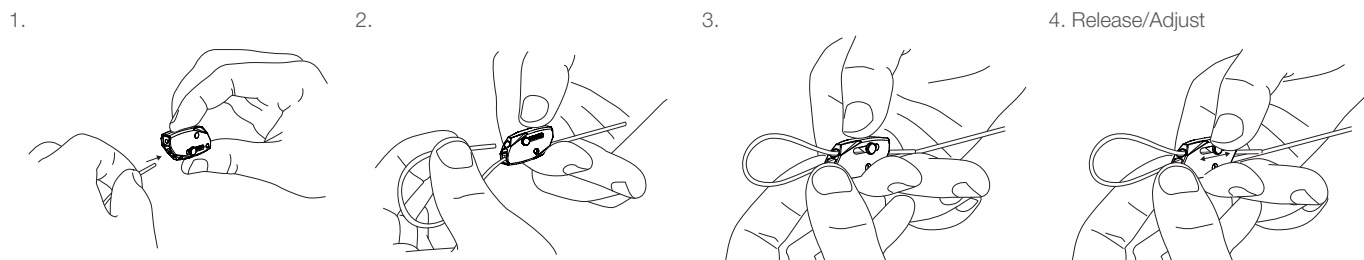

Ensure a minimum 75 mm of tail wire exits the hanger.

SPECIFICATION

Wire rope construction



7 x 7

Reference	Diameter of wire (mm)	Length (m)
ROP-1.5MM-100M-BL2-UK	Ø 1.5 mm	100
ROP-2MM-100M-BL2-UK	Ø 2.0 mm	100
ROP-2.5MM-100M-BL2-UK	Ø 2.5 mm	100
ROP-2MM-150M-BL2-UK	Ø 2.0 mm	150
ROP-2.5MM-150M-BL2-UK	Ø 2.5 mm	150

The wire ropes used within our product ranges are manufactured with galvanised coating in accordance with the norm EN 12385.

DETAILS OF ROPE:

Length: 100 m & 150 m
Diameter of rope: 1.5 mm, 2 mm, 2.5 mm
Number of strands: 7
Lay: 7
Finish: Galvanised
Core: SC
Tensile (strength) of wire: 1770 N/mm²

Please contact us for more information.

TEST DETAILS:

Date of test of sample of rope:

05.03.2018

Actual break load: 3.2 KN

Minimum breaking load: 2.54 KN

Working load limit: 0.508 KN

Factor of safety: 5:1

