

Durafoot FX Foot

Pipe work, Cable management

Typical Application

The 7 FX feet of the Durafoot Range are a practical and versatile support solution for supporting your services on a roof. The feet have a 40mm x 20mm Pre Galvanised channel recessed into the top face allowing you to use standard strut fixings to secure your services to the feet. This product is suitable for pipe work and cable tray runs.

The Durafoot Range of products are made of durable recycled rubber, which offers built-in anti-vibration and makes it both economical and environmentally friendly.

The FX range from Durafoot is a neat and tidy support solution. Made from UV stabilised, recycled rubber with a channel moulded into the top face, allowing fixing of 40mm x 40mm box section or strut.

PLEASE NOTE:


The FX range is supplied without any fixings or fittings.

FEET FLEECES

Recommended for use on PVC membrane roof surfaces to prevent migration of plasticizers.



Model	Height (mm)	Width (mm)	Length (mm)	Max. Loading per foot (kg)
	A	B	C	
FX 250	95	180	250	160
FX 500	80	180	500	400
FX 500 High	150	180	500	400
FX 600	95	180	600	450
FX 1000	95	180	1000	645
FX 250 Low	50	130	250	160
FX 500 Low	50	130	500	400

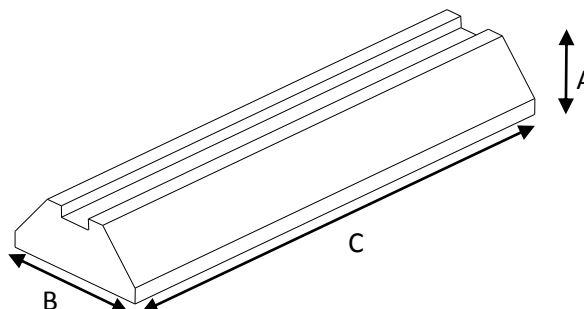

Material Specification

Durafoot FX Range
SBR-Recycled Rubber. Bound using a ratio of high quality moisture curing Polyurethane Pre-Polymer. BS7188:1989 +A2:2009 and BS EN1176-7:2008

METAL PROFILE

Aluminium 40mm x 20mm profile compatible with strut fixings

WORKING CONDITIONS

Suitable for internal or external applications in temperatures between -40°C to +80°C.
BS EN 60068-2-14